

OPTICAL TRANSMISSION SYSTEM CONSTRUCTING METHOD AND SYSTEM

BACKGROUND OF THE INVENTION

Field of the invention

The present invention relates to an optical transmission method and system for carrying data transmission with use of optical fiber. More particularly, it concerns an optical transmission method and system preferable in high-speed data transmission to a long distance.

Description of the Prior Art

Prior arts related to the optical transmission system include, for example, the technique disclosed in the Japanese Patent Application Laid-Open 3-296334.

However, it is demanded to accomplish an optical transmission system operating at further higher speed since development of the modern information society has increased long-distance communication traffic in recent years. Also, it is desired that the optical transmission system can transmit data to further longer distance without repeat in view of reliability and cost of the system.

Furthermore, the number of fields to which an optical transmission system is applied has been increased with the recent

development of the information society. For the reason, it is needed to accomplish the optical transmission system having a variety of functions and capacities to satisfy specific requirements.

5 SUMMARY OF THE INVENTION

In view of the foregoing, it is an object of the present invention to provide an optical transmission system constructing method capable of easily constructing an optical transmission method and system
10 depending on required functions and capacities.

Briefly, the foregoing object is accomplished in accordance with aspects of the present invention by an optical transmission system. The optical transmission system is characterized in constructing a line terminal
15 having multiplexing means for multiplexing signals and demultiplexing means for demultiplexing the multiplexed signal so that to serve as a transmitter, the line terminal is selectively capable of implementing either a first combination of an electric-to-optic converter
20 circuit for converting the electric signal multiplexed by the multiplexing means to a transmission light with an optical fiber amplifier for amplifying the transmitting light before feeding into an optical transmission medium or electric-to-optic converting
25 means having a semiconductor optical amplifier for

converting the electric signal multiplexed by the multiplexing means to a transmission light before feeding an optical transmission line. The optical transmission system also is characterized in
5 constructing the line terminal so that to serve as a receiver, the line terminal is selectively capable of implementing either a second combination of an optical fiber amplifier for amplifying a receiving light from an optical transmission medium with an
10 optic-to-electric converter circuit for converting the amplified receiving light to electric signal before feeding to the demultiplexing means or an optic-to-electric converting means for converting the received light from the optical transmission medium to
15 electric signal before feeding to the demultiplexing means with an avalanche photodiode used as light receiver.

Also, the optical transmission system is characterized in constructing the optical transmission
20 system for use as a longdistance optical transmission system, a plurality of the line terminals having the first combination to serve as the transmitter and the second combination to serve as the receiver implemented therein each are connected to the optical transmission
25 medium through a single or a plurality of repeaters

inserted in the optical transmission medium for multiplying the optical light signal on the optical transmission medium.

Further, the optical transmission system is characterized in constructing the optical transmission system for use as a shortdistance optical transmission system, the plurality of the line terminals having the electric-to-optic converting means having a semiconductor optical amplifier therein to serve as the transmitter and the optic-to-electric converting means having the avalanche photodiode used as the light receiver to serve as the receiver implemented therein each are directly connected to the optical transmission line.

The optical transmission system constructing method of the present invention enable an easy construction of any of the long-distance an short-distance optical transmission system only by selecting desired types of the transmitters and receivers to be implemented to change the combinations of the units. This is because the line terminal is constructed so that to serve as the transmitter, the line terminal is selectively capable of implementing either the first combination of an electric-to-optic converter circuit for converting the electric signal multiplexed by the multiplexing

means to the transmission light with an optical fiber
amplifier for amplifying the transmitting light before
feeding into an optical transmission medium or
electric-to-optic converting means having the
5 semiconductor optical amplifier for converting the
electric signal multiplexed by the multiplexing means
to the transmission light before feeding an optical
transmission line, and that to serve as the receiver,
the line terminal is selectively capable of
10 implementing either the second combination of an
optical fiber amplifier for amplifying the receiving
light from an optical transmission medium with an
optic-to-electric converter circuit for converting the
amplified receiving light to electric signal before
15 feeding to the demultiplexing means or an optic-
to-electric converting means for converting the
received light from the optical transmission medium to
electric signal before feeding to the demultiplexing
means with an avalanche photodiode used as light
20 receiver.

The foregoing and other objects, advantages, manner
of operation and novel features of the present
invention will be understood from the following
detailed description when read in connection with the
25 accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the accompanying drawings:

Fig. 1 is a block diagram for a functional construction of a optical transmission system of an embodiment of the present invention.

Fig. 2 is an overall configuration for a network system related to the embodiment.

Fig. 3 is a configuration for a network among a large-scale switching nodes extracted from the network system.

Fig. 4 is a configuration for a network among a small-scale switching nodes and among a small-scale switching nodes and the large scale switching node extracted from the network system.

Fig. 5 is a configuration for a network for a metropolitan area extracted from the network system.

Fig. 6 is block diagrams for a functional construction of a node.

Fig. 7 is a hierarchical construction of a network system.

Fig. 8 is a frame construction for a multiplexing frame used in the network system.

Fig. 9 is logical positions of path groups.

Fig. 10 is a bit allocation of overhead of the path groups.

Fig. 11 is an example of setting the path group in a ring.

Fig. 12 is path group switching procedures at failure.

5 Fig. 13 is a typical sequence of switching requests.

Fig. 14 is a block diagram for a configuration of the network system related to the embodiment.

Fig. 15 is a sequence diagram for transfer of alarms in the network system.

10 Fig. 16 is a block diagram for the optical transmission system for a long distance system.

Fig. 17 is a block diagram for the optical transmission system for a short distance system.

15 Fig. 18 is a block diagram for a clock transit system for the optical transmission system.

Fig. 19 is bytes to be scrambled of an overhead in a STM-64 section.

Fig. 20 is a block diagram for the 1R-REP.

20 Fig. 21 is a block diagram for a board construction of the 1RREP.

Fig. 22 is a format for a surveillance and control signal for use in the surveillance and control of the 1R-REP.

25 Fig. 23 is a block diagram for an inter-office transmission line interface of the LT-MUX.

Fig. 24 is a block diagram for the intra-office transmission line interface of the LT-MUX.

Fig. 25 is a relationship of multiplex and demultiplex between a STM-64 frame and a STM-1x64 supported by the LT-MUX.

Fig. 26 is a block diagram for a transmitter of the LT-MUX forming the long distance system.

Fig. 27 is a block diagram for the transmitter of the LT-MUX forming the short distance system.

Fig. 28 is a block diagram for a receiver of the LT-MUX forming the long distance system.

Fig. 29 is a block diagram for the receiver of the LT-MUX forming the short distance system.

Fig. 30 is a block diagram for a node having LT-MUXes and an ADM switch used.

Fig. 31 is a block diagram for extracted parts serving to the surveillance and control system for the LT-MUX.

Fig. 32 lists features of the functional blocks of the surveillance and control system.

Fig. 33 is a block diagram for a redundancy configuration of a transmitting system in the LT-MUX.

Fig. 34 is a block diagram for the redundancy configuration of a receiving system in the LT-MUX.

Fig. 35 is a block diagram for construction of a

hitless switching process feature section for
transmission line.

Fig. 36 is a block diagram for a construction of a
3R-REP.

5 Fig. 37 is a front view for an implementation of
the 1R-REP.

Fig. 38 is structures of a optical preamplifier and
optical booster amplifier forming a single 1R-REP
system.

10 Fig. 39 is a front view for an implementation of
the LT-MUX.

Fig. 40 is a front view for an implementation of
two systems of the LT-MUX in a single rack without the
line redundancy configuration.

15 Fig. 41 is a front view for an implementation of
the LT-MUX for constructing the small scale switching
node with a 40G switch unit built in as shown in Fig.
6b.

Fig. 42 is a structural view for a 40G switch.

20 Fig. 43 is a front view for an implementation of
the LT-MUX for constructing the large scale switching
node.

Fig. 44 is a front view for an implementation of
the 3R-REP.

DETAILED DESCRIPTION OF THE INVENTION

The following describes an embodiment according to the present invention for the optical transmission system by reference to the accompanying drawings.

1. General Description

First, this section outlines the optical transmission system of the embodiment.

Fig. 1 is a block diagram for the functional construction of the optical transmission system of the embodiment.

The optical transmission system, as shown in Fig. 1a, is an ultralong distance transmission system for making optical transmission between line terminals with multiplexers (hereinafter referred to as the LT-MUX 1) or between the LT-MUX 1 and a regenerator (hereinafter referred to as the 3R-REP 3) with use of an optical amplifier repeater (hereinafter referred to as the 1R-REP 2). The system can send the data at 10 Gb/sec through an optical fiber 40 up to 320 km by the 3R-REP 3 at the longest intervals of 80 km by the 1R-REP 2.

The LT-MUX 1 makes a multiplex and section-termination-process (12) of the data received by an intra-office interface 11 provided therein, and converts them to optical signal (13). An optical

booster amplifier 14 magnifies the optical signal before feeding it into an optical transmission medium. On the contrary, the data received from the optical transmission medium is magnified by an optical
5 preamplifier 15 before being converted to electrical signal (16). The signal then is demultiplexed and section-termination-processed (12) before being distributed to the intra-office interfaces 11. The 1R-REP 2 repeats the optical signal in a way that any
10 of optical fiber amplifiers 21 and 22 magnifies the optical signal received from the optical transmission medium before feeding it out. The 3R-REP 3 regenerates the data to repeat in a way that the data received from the optical transmission medium are magnified by an
15 optical preamplifier 35 before being converted to electrical signal (36). The electrical signal then is demultiplexed and section-termination-processed (32) and is multiplexed and section-termination-processed (32) again. It further is converted to optical signal
20 (33) and magnified by an optical booster amplifier 34 before being fed into the optical transmission medium.

The interface of any equipment with the optical transmission medium (hereinafter referred to as the inter-office interface) is equivalent to the CCITT
25 recommended synchronous transport module level N (STM-N)

where $N = 64$, and uses a scrambled binary NRZ (non-return to zero) as transmission line code. A spectrum broadening is used to prevent a stimulated Brillouin scattering due to a higher power output.

5 The intra-office interface 11 of the LT-MUX 1 can contain a series of STM-1 (150 Mb/sec) by 64 or a series of STM-4 (600 Mb/sec) by 16. Note that the series of STM-4 (600 Mb/sec) by 1 can be compatible with the series of STM-1 by 4.

10 The optical transmission system can be configured in another way that instead of the 1R-REP 2 shown in Fig. 1a, the LT-MUXes 1 are directly connected together or the LT-MUX 1 is directly connected with the 3R-REP 3. In this case, the transmission distance is up to
15 120 km without repeater.

 Also, the optical transmission system can be configured in still another way as that shown in Fig. 1b, the 1R-REP 2, the optical booster amplifier 14, and the optical preamplifier 15 are omitted, but LT-MUXes 1
20 having an opto-electric converter 2000 and an electro-optic converter 2010 which are different in the characteristics from those of the LT-MUX 1 in Fig. 1a are directly connected together. In this case, the output level is around +6 dBm, and the transmission
25 distance is up to 80 km without repeater.

The optical transmission system having the LT-MUX 1, the 3R-REP 3, the optical booster amplifier 14, and optical preamplifier 15 is called the long-distance system below; and the optical transmission system having no optical booster amplifier 14 and optical preamplifier 15 in the LT-MUX 1 and 3R-REP 3 is called the short distance system below.

2. Overall System Configuration

In turn, this section describes a network system having the optical transmission system of the embodiment.

Fig. 2 is an overall configuration for a network system related to the embodiment.

In the figure are indicated a large scale switching node 110 having the LT-MUX 1 of the embodiment and a small scale switching node 120 having the LT-MUX 1 of the embodiment.

The large-scale switching nodes 110 in the network system related to the embodiment, as shown in the figure, are directly connected therebetween in a ladder-shaped structure with use of the 1R-REP 2 and the 3R-REP 3. The network system has routes diversified therein and the CCITT recommended VC-3/4 path protection switch in the meshed network, thereby increasing reliability of the network. The small-scale

switching nodes 120 are ringstructured, and the
small-scale switching nodes 120 and the large scale
switching nodes 110 are also ring-structured. This
does not only provide a multiplexing effect that allows
5 efficient use of the large-capacity transmission
medium, but also keeps two routes that can increase the
reliability. In addition, a metropolitan area has a
multiple of rings that can increase the reliability in
an area of relatively narrow, but large, facial
10 extending traffic.

Fig. 3 is a configuration for a network among the
large-scale switching nodes 130 extracted from the
network system.

The large-scale switching nodes 130, as shown in
15 the figure, are directly connected thereamong with use
of the 1R-REPs 2 and the 3R-REPs 3 without switching
through an intermediate node, thereby decreasing the
line cost. A distance between the 1R-REPs 2 is up to
80 km in view of the S/N design, and the one between
20 the 3RREPs 3 is up to 320 km in view of the nonlinear
distortion of the fiber.

Fig. 4 is a configuration for a network among the
small-scale switching nodes 120 and among the
small-scale switching nodes 120 and the large scale
25 switching nodes 110 extracted from the network system.

If a distance between the small-scale switching nodes 120 is shorter than 120 km, as shown in the figure, no repeaters are used, but direct connection is made between any two of the smallscale switching nodes 120. If the distance exceeds 120 km, the 1R-REP 2 is used to make the long distance system as mentioned previously. If the distance is shorter than 80 km, as will be described in detail later, the 10 Gb/sec transmitter is replaced by the one made up of a semiconductor optical amplifier and an APD (avalanche photodiode) to form a further economic short distance system (Fig. 1b).

Fig. 5 is a configuration for a network for the metropolitan area extracted from the network system.

The metropolitan area, as shown in the figure, has a plurality of adjoining rings formed of the transmission media connecting the nodes in a meshed network, thereby accomplishing efficient multiplex operation and high reliability. It should be noted that there will be a greater number of the shorter node distances than 80 km. Then, as described above, the short distance system is made up of the semiconductor optical amplifier and the APD to form the network at low cost.

Fig. 6 is block diagrams for the functional

construction of the node.

The large scale switching node 110, as shown in Fig. 6a, has two LT-MUXes 1 and a VC-3/4 cross-connection switch 111 for path switching and setting at the VC-3/4 level in the synchronous digital hierarchy (SDH). The two LT-MUXes 1 are connected by a high-speed interface which will be described later, but not any intra-office interface. The large scale switching node 110 also has the STM-1 interface and the STM-4 interface as the intraoffice interfaces. These interfaces can connect a line repeater terminal 5000 for transmission between a 600 Mb/sec or 2.4 Gb/sec offices, a cross-connection equipment 5100 for terminating the intra-office interface 111, and an ATM cross-connection switch 5200. The ATM cross-connection switch 5200, if used, can accomplish lower cost and decrease cell delay as the 600 Mb/sec intra-office interface is used. Note that the large scale switching node 110 can be alternatively made up of the two LTMUXes 1 and a cross-connect equipment 111.

The small scale switching node 120 is the same as the large scale switching node 110 or as shown in Fig. 1b, has the LT-MUX 1 and an VC-3/4 add-drop multiplex (ADM) switch. The small scale switching node 120 also, like the large scale switching node 110, has the STM-1

interface and the STM-4 interface as the intraoffice
interfaces, which can connect the line repeater
terminal 5000 for transmission between a 600 Mb/sec or
2.4 Gb/sec offices, the cross-connection equipment 5100
for terminating the intraoffice interface 111, and the
ATM cross-connection switch 5200.

The intra-office interface 11 of the LT-MUX 1 is
used for the STM-1 interface and the STM-4 interface
for each node.

Table 1 shows a hierarchy of the network system and
terminals at the respective hierarchy level.

Table 1

NO.	LEVEL	TERMINAL	OVERHEAD
1	VC-3/4	VC-1/2 processors, and ATM unit	VC-3/4 POH
2	VC-3/4 path group (VC-3/4 PG)	VC-3/4 cross-connector (virtual ring branch - insertion point)	23 byte of representing VC-3/4 POH
3	STM-64 section	LT-MUX	MSOH
4	Regenerator section	3R-REP and LT-MUX	RSOH
5	Linear repeater section	1R-REP, 3R-REP, LT-MUX	Wavelength multiplexed management signal

As shown in the table, the present embodiment defines the new VC3/4 path group to accomplish easy path switching at failure of any transmission medium.

Fig. 8 is a frame construction for an STM-64 which is an inter-office interface.

The overhead for the VC-3/4 path group, as shown in the figure, is the 23 byte of the representing VC-3/4 POH forming the VC-3/4 path group.

The following describes the path switching with use of the path group at failure of any transmission medium.

The term "path group" as used herein denotes a set of parts within a ring of the VC-3/4 path that a point of insertion into a virtual ring is equal to each other and a point of branch from the virtual ring is equal to each other. The term "virtual ring" as used herein denotes a ring extracted from the network as a part which can virtually form a ring-like path. It should be noted that as shown in Fig. 9, the path group is positioned between section and path layer in view of the network layer structure.

The embodiment switches the path group when the path group is at failure. The path group is managed with use of the 23 byte of the representing VC-3/4 path overhead within the path group. Fig. 10 is a bit allocation of the 23 byte. The path group failure is

detected by a path group alarm indication signal (PGAIS) defined in the Z3 byte.

Table 2 shows path switching features in the embodiment.

Table 2

NO.	ITEM	DESCRIPTION
1	Switching unit	VC-3/4 path group (set of VC-3/4 paths in same route within ring)
2	Switching network topology	Virtual ring (on VC-3/4 path mesh)
3	Protection form	1 + 1 bidirectional switching (Working path group and protection group are turned reversely on ring.)
4	Switching control method	Autonomous switching to ground office in ring by APS control for path group
5	APS byte	b1 to b4 of Z3 byte path group representing VC-3/4
6	APS protocol	Conform to 1 + 1 switching protocol of section APS
7	Switching trigger	Path group AIS reception at path group terminal point (Path group AIS bit in Z4 type = 1)
8	Switching equipment	VC-3/4 cross-connection switch (LT-MUX with XC and LT-MUX with ADM)
9	Switch control method	Switching ACM* meshed network in units of VC.

* ACM = address control memory which is a memory for controlling switches in cross-connection unit and the like.

As shown in Table 2 above, the embodiment uses an alternative meshed network switching to increase the reliability. Controlling the mesh switching in the embodiment is the autonomous switching in units of the VC-3/4 path group virtual ring, which conforms to the section APS recommended by CCITT.

Fig. 11 is an example of setting the path group in the ring. The protection path group is extended in the direction reverse to the working one.

Fig. 12 is path group switching procedures at failure. Fig. 13 is a typical sequence of switching requests. The switching sequence, as shown in Fig. 13, conforms to the usual 1 + 1 section APS. Finally, Table 3 shows priorities of the switching requests and coding of the Z3 byte, and Table 4 shows coding of the path group status.

Table 3

PRIORITY	TYPE OF SWITCHING REQUEST	DESCRIPTION	Z3 BYTE b1,b2,b3,b4
1	Lockout	Inhibit all switchings by any of following switching requests, with working state held.	-
2	Forced switching (FS)	Make switching if protection path group is normal.	1 1 1 0
3	Signal failure (SF)	Make switching if protection path group is normal after results of surveillance of working path group AIS and units are triggered for failure. Path group AIS is generated by LOS, LOF, and severed MER.	1 1 0 0
4	Manual switching	Make switching if protection path group is normal.	1 0 0 0
5	Wait to restore	Do not release from switched state during the waiting period even if the working path group is restored while the automatic switching SF or SD is made.	0 1 1 0
6	Exerciser	Test switching control system.	0 1 0 0
7	Reverse request	Respond operation of switching to requesting source after receiving request for forced switching or signal failure or wait to restore.	0 0 1 0
8	No bridge required	Inhibit all switchings by any of the following switching requests, with the working state held.	0 0 0 0

Table 4

z3 BYTE b7, b8	DESCRIPTION
0 0	Normal state
1 1	PG-AIS*
1 0	PG-FERF

* PG-AIS = path group AIS.

3. Surveillance and Control System

This section describes a surveillance and control system for the network system related to the embodiment.

Fig. 14 is a block diagram for a configuration of the network system related to the embodiment.

. Each of the LT-MUXes and the 1R-REPs 2 has a surveillance and control function 1001 and an OpS-IF 1002 for connection with an OpS (operation system) 1000. The surveillance and control are made under control of the OpS 1000 which governs the surveillance and control of the system.

The embodiment makes a wavelength multiplex of a surveillance and control signal with a main signal on the STM-64 interface before transmitting the multiplexed signal to monitor and control the

1R/3R-REPs 3 having no OpS IF 1002 remotely. That is,

the OpS 1000 gives a direction signal to the equipment having the OpS IF 1002 to make the equipment superimpose the direction signal onto the surveillance and control signal, or makes the 1R/3R-REP having no
5 OpS IF 1002 transfer an alarm detected or generated by the 1R/3R-REP to the equipment having the OpS IF 1002. Alternatively, it can be made that the 1R/3R-REP should have the OpS IF 1002 to allow the OpS 1000 to monitor and control the 1R/3R-REP directly.

10 In turn, the surveillance and control signal of 384 kb/sec is transferred by a light of the same 1.48 μ m wavelength as that of a pumping light source of the 1R-REP 2. The surveillance and control signal, as
15 shown in Fig. 22, also has a 48 byte frame length for a 1 msec frame period, 24 bytes (192 kb/sec) of which are allocated to a DCC (data communication channel) for the remote control, 8 bytes (64 kb/sec) for an order wire, and 6 bytes (48 kb/sec) for the alarm transfer. The
20 surveillance and control signal allows each of the 1R/3R-REPS 2 to inform the state and alarm. That is, each of the 1R/3R-REPS can generate its own monitoring information and repeat the surveillance and control
25 signal generated by the preceding 1R/3R-REP as well. The state monitoring is made at intervals of 1 sec so that an access collision cannot happen even if number

of the 1R/3RREPs is around 100.

Also the surveillance and control signal has 1 byte allocated there to as the 1R-REP section has a feature equivalent to that of the usual AIS. The 1R/3R-REP
5 having detected a fatal failure, such as loss of the main signal, transfers its own ID to the succeeding repeater using the one byte. This 1R/3R-REP 2 repeats the one byte to the LT-MUX 1. This allows informing of the 1R/3R-REP section AIS at intervals of 1 msec. If
10 it is used, the 3R-REP converts it to an S-AIS (section alarm indication signal).

The features of the surveillance and control system are charted in Tables 5 and 6. Surveillance and control items are charted in Table 7.

Table 5

ITEM	DESCRIPTION	NOTE
Surveillance and control equipment	<p>(1) LT-MUX Has OpS-IF and is started by direction by OpS.</p> <p>(2) 1R-REP Has RMT-IFs, such as DCC-IF and ALARM-IF, and is started by direction by surveillance and control signal.</p> <p>(3) 3R-REP Same as 1R-REP.</p>	1R/3R-REP can have OpS-IF.
Surveillance and control signal	<p>(1) Physical characteristics Frame length: 48 bytes. Frame period: 1 msec. Rate: 384 kb/sec. Wavelength: 1.48 um. Line code: CMI.</p> <p>(2) Generation method Generation by LT-MUX and 1R/3R-REP.</p> <p>(3) Transfer method Is wavelength-multiplexed with the main signal before being transferred. 1R/3R-REP determines either repeat or reception with destination ID added on surveillance and control signal. For repeat, 1R/3R-REP stores it in the reception buffer before transmission.</p> <p>(4) Access to 1R/3R-REP Access can be made from either west or east.</p>	<p>Frame synchronization by CMI code rule violation.</p> <p>To increase reliability.</p>
Monitoring method	<p>(1) Amount of information: 4 bytes of surveillance and control signal.</p> <p>(2) Monitoring interval/alarm transfer interval: 1 sec. However, if fatal failure, such as loss of signal, is detected, 1R/3R-REP section AIS is transferred at intervals of 1 msec.</p> <p>(3) Transference can be made to either west and east.</p>	Equivalent to feature of SONET F1 byte.


Table 6

ITEM	DESCRIPTION	NOTE
Control method	<p>(1) Surveillance and control signal has DCC area of 24 bytes (equivalent to 192 kb/sec) provided therein for setting surveillance and control items.</p> <p>(2) Surveillance and control signal has order wire area of 8 bytes (equivalent to 64 kb/sec) provided therein. This allows maintenance communication.</p> <p>(3) Access can be made from either west or east.</p> <p>(4) Response is made after execution of instruction.</p>	Setting can be made also from OpS if necessary.

5

10

Table 7

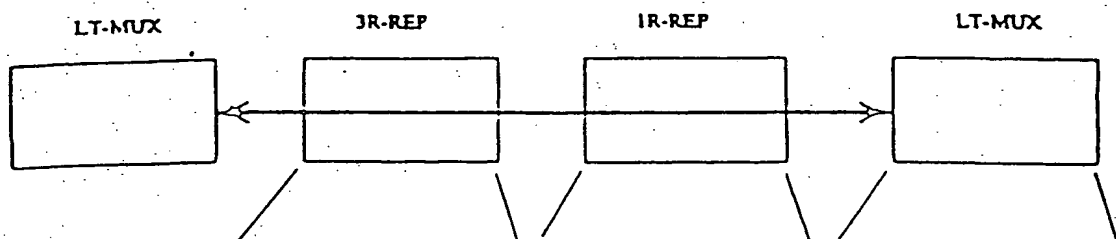

	Monitoring items	Monitoring items	Monitoring items
IR section monitoring items	<ul style="list-style-type: none"> Optical fiber disconnection (LOS) Loss of main signal (Preceding REP failure) Loss of surveillance and control signal (Preceding REP failure) Surveillance and control signal LOF (CHI) Surveillance and control signal FCS error 	<ul style="list-style-type: none"> Optical fiber disconnection Loss of main signal (Preceding REP failure) Loss of surveillance and control signal (Preceding REP failure) Surveillance and control signal LOF (CHI) Surveillance and control signal FCS error 	<ul style="list-style-type: none"> Optical fiber disconnection (LOS) Loss of main signal (Preceding REP failure) Loss of surveillance and control signal (Preceding REP failure) Surveillance and control signal LOF (CHI) Surveillance and control signal FCS error
JR section monitoring items	<ul style="list-style-type: none"> Main signal LOF Error rate degradation (BI) F1 byte process S-AIS detection, generation, and transfer 		<ul style="list-style-type: none"> Main signal LOF Error rate degradation (BI) F1 byte process S-AIS detection, generation, and transfer
Others	<ul style="list-style-type: none"> Equipment failure Input, intermediate, and output signal levels LD temperatures LD biases Gains <p>Control items</p> <ul style="list-style-type: none"> Year and date setting Output halt or release Soft strap setting and reading related to SDH <p>Example:</p> <ul style="list-style-type: none"> BI error rate-degradation threshold value Order wire of 64 kb/sec DCC of 192 kb/sec 	<ul style="list-style-type: none"> Equipment failure Input, intermediate, and output signal levels LD temperatures LD biases Gains <p>Control items</p> <ul style="list-style-type: none"> Year and date setting Output halt or release <p>Order wire of 64 kb/sec</p> <p>DCC of 192 kb/sec</p>	<ul style="list-style-type: none"> Other SDH features Equipment failure Input, intermediate, and output signal levels LD temperatures LD biases Gains <p>Control items</p> <ul style="list-style-type: none"> Year and date setting Output halt or release Soft strap setting and reading related to SDH <p>Example:</p> <ul style="list-style-type: none"> BI error rate-degradation threshold value Order wire of 64 kb/sec DCC of 192 kb/sec

As shown in Fig. 7, if any of the monitoring items is at failure, the equipment transfers the alarm. The alarm detection and transfer are made for the four layers, including the 1R section layer, the 3R section layer, the LT section layer, and the path layer.

The 1R section layer deals with any of the alarms detected by the 1R-REP 2. The alarm is transferred by the surveillance and control signal. The 1R section layer processes the following items.

10 (a) Optical fiber disconnection: The main signal input and the surveillance and control signal input are disconnected by an optical fiber disconnection.

(b) Loss of main signal: The main signal input is lost by a preceding 1R/3R-REP stage failure.

15 (c) Loss of surveillance and control signal: The main signal input is lost by a preceding 1R/3R-REP stage failure.

20 (d) Surveillance and control signal LOF (loss of frame): The frame synchronization surveillance and control signal is lost.

(e) Surveillance and control signal FCS (frame check sequence) error: A code error is detected by checking the FCS of the surveillance and control signal.

25 (f) 1R section failure REP identification: The 1R-REP having detected a fatal failure writes its own

ID into a predetermined byte provided in the surveillance and control signal before generating the surveillance and control signal. This accomplishes the feature of F1 byte for the SDH recommended by the CCITT.

5 The 3R section layer performs processes about an RSOH (regenerator section overhead) of the STM frame.

(a) Main signal LOF: Loss of frame of the main signal is detected with A1 and A2 bytes.

(b) Error rate degradation: MER and ERR MON are
10 generated with use of B1 byte.

(c) F1 byte process: If it detects a fatal failure, the 3R-REP writes its own ID into the F1 byte of the sending STM frame. Also, if it receives the surveillance and control signal indicating that the
15 preceding the 1R-REP is at failure, the 3RREP writes the ID in a predetermined byte into the F1 byte of the sending STM frame.

(d) S-AIS detection, generation, and transfer:
S-AIS process is made.

20 The LT section layer performs processes about an MSOH (multiplex section overhead) of the STM frame.

The path layer performs processes about a VC-3/4 POH (path overhead) of the STM frame.

In turn, the alarm of the 1R section is sent to the
25 LT-MUX through 1R-REP and 3R-REP by the surveillance

and control signal.

For any of the fatal failures, such as loss of the main signal, if the alarm is transferred through the 3R-REP, then the 3R-REP converts it to S-AIS. Fig. 15 is a sequence diagram for transfer of the alarm in the network system.

4. Optical Transmission System

This section describes an optical transmission method for the optical transmission system related to the embodiment.

Fig. 16 is a block diagram for the optical transmission system for the long distance system.

As shown in the figure, the embodiment includes a modulator integrated light source module 200 of 1552 nm wavelength having little chirping as a sending light source for the LT-MUX 1 and the 3RREP 3. To suppress an SBS (stimulated Brillouin scattering) caused in the optical fiber, the embodiment uses the spectrum broadening that a signal of a low-frequency oscillator 201 is applied to a laser section of the modulator integrated light source module 200 to make a light frequency modulation. Optical booster amplifiers 14 and 34 use a bidirection pumping method for which a pumping light source of 1480 nm wavelength is used. The transmission power and chirping quantities of a

modulator are optimized to accomplish the longest regeneration distance of 320 km.

To transmit the supervisory signal, a supervision light source 202 of 1480 nm wavelength range provided in the light booster amplifier is used. The supervisory signal is wavelengthmultiplexed with the main signal before being transmitted to a downstream. To prevent output of the light booster from decreasing, a WDM (wave division multiplex) coupler 203 for wavelength multiplex of the surveillance and control signal with the main signal is made to also serve as WDM coupler for laser pumping.

A forward pumping optical preamplifier 35 having a pumping source of 1480 nm range accomplishes highly sensitive reception.

On the other hand, to receive the supervisory signal, a WDM coupler 210 for pumping Erbium-doped fiber is used to draw the supervisory signal, which is received by an exclusive receiver. This minimizes degradation of the NF (noise figure). With the use of the light booster amplifiers 13 and 34 and light preamplifiers 5 and 35, the distance between the LT-MUX 1 and the 3R-REP 3 can be made 120 km if they are directly connected together.

The 1R-REP 2 has two Erbium-doped fibers 211 and

216 and pumping light sources of 1480 nm wavelength range used therein. The former laser pumping stage 212 pumps forward, and the latter three laser pumping stages 213, 214, and 215 pump bidirectionally. This
5 accomplishes both lower NF and higher output power. For reception of the supervisory signal by the 1RREP 2, a WDM coupler 217 for pumping the first Erbium-doped fiber 211 stage is used to draw the supervisory signal before an exclusive receiver 218. This minimizes
10 degradation of the NF below 0.2 dB to accomplish an optimum reception of the supervisory signal.

For transmission of the supervisory signal by the 1R-REP 2, a light source 219 of 1480 nm wavelength
+ range for the supervisory signal is used to
15 wavelength-multiplex with the main signal before being transmitted to a downstream. Wavelength multiplexing of the supervisory signal with the main signal is made by using a WDM coupler 220 which also serves to pump the latter Erbium-doped fiber 216.

20 To prevent output of the light booster from decreasing, the WDM (wave division multiplex) coupler 203 for wavelength multiplex of the surveillance and control signal with the main signal is made to also serve as the WDM coupler for laser pumping. In such a
25 way as described above, with the surveillance and

control signal demultiplexed and multiplexed at the input and the output of the 1R-REP 2 respectively, an inter-office cable connected to the equipment can be used to inform a failure to the downstream even if the failure is the input signal disconnection or in the transmission medium within the 1R-REP 2.

Fig. 17 is a block diagram for the optical transmission system for the short distance system.

The short distance system, as shown in the figure, like the long distance system, uses a modulator integrated light source module 200 of 1552 nm wavelength for a transmitting light source. The short distance system is different from the long distance system in that a transmitter of the short distance system uses a semiconductor light amplifier 230 as an optical booster to make the transmitter small, and a receiver uses an optical receiver 231 of small size and low power consumption having a superlattice APD of low noise and wide frequency response.

If it has a high optical power input thereto, the optical fiber has an SBS caused, resulting in degradation of the transmission characteristics. For the CW light, the SBS is caused with the optical fiber input power higher than +6 dBm. In modulation, the SBS is caused by blight-line spectra contained in the

signal light. It is generated at a light power level higher than the one for the CW light.

To suppress the SBS, the embodiment uses a way that the generated laser light is modulated with a low
5 frequency signal to broaden the light spectra equivalently. The suppression of the SBS by broadening the light spectra is described in an article entitled "Suppression of Stimulated Brillouin scattering and
Brillouin Crosstalk by Frequency Sweeping
10 Spread-Spectrum Scheme," Journal Optical Communications, Vol. 12, No. 3, pp. 82-85 (1991), A. Hirose, Y. Takushima, and T. Okoshi.

Fig. 18 is a block diagram for a clock transit system for the optical transmission system.

15 A clock for process of section overhead of transit signals in the LT-MUX 1 and 3R-REP 3, as shown in the figure, is an extracted clock smoothed by a PLL. The PLL has a time constant which is set in an order of msec that can almost completely suppress random jitters
20 superimposed through the transmission circuit and line. A low-speed wander of the transmission clock is transferred by a pointer justification feature of the section overhead. With these, the 3R-REP 3 can make the repeat without accumulation of the jitters, so that
25 it is free of the jitter accumulation due to

continuation of an identical code.

In transmission of the SDH section overhead, all the section overhead bytes except parts of the first line are scrambled. (Fig. 19 shows the parts of the first line, including 4 bytes containing the last 2 A1 bytes and first 2 A2 bytes, 64 C1 bytes, and succeeding 2 x 64 fixed bytes.) This prevents repetition of a fixed pattern as much as hundreds of bytes, reduces a pattern jitter, and averages output of a timing filter. If a 4-byte synchronous pattern is used, a frame synchronization protection is longer than 10 years in average misframe interval for five consecutive forward protection, and is lower than 1% in misframe probability and rehunging probability for two consecutive backward protection.

5. Description of 1R-REP

This section describes the 1R-REP 2.

Fig. 20 is a block diagram for the 1R-REP. Table 8 charts major features of the 1R-REP 2.

Table 8

ITEM		DESCRIPTION
5	Main signal interface	Signal wavelength
		1.552 μm ± 0.001 μm
		Mean light output
		+10 to +12 dBm
		Input light level
10		-18 to 0 dBm
		Noise figure
		Lower than 7 dB
		Pumping method
		Bidirectional pumping of Erbium-doped fiber, with 1.48 μm pumping lasers.
15	Surveillance and control method	<ul style="list-style-type: none"> Transference of surveillance and control signal by 1.48 μm wavelength multiplex. Implementation of surveillance and control section in main signal unit.
	Physical implementation method	300 mm high x 3 shelves per bay (1800 x 795 x 600 mm)
	Cooling method	Natural convection, with convection guiding plate of 100 mm high.
	Accommodation of systems	Two systems per shelf (one system contains both east and west systems)
	Environmental conditions	Temperature: 10 to 40°C. Humidity : 20 to 80%
20	Input power condition	-42 to -53 V

As shown in Fig. 20, the 1R-REP optical transmission system consists of two amplifier stages, including an optical preamplifier 301 for magnification with a low noise and an optical booster amplifier 320 for high power magnification. An output of the optical preamplifier 301 is connected to an input of the optical booster amplifier 320. This accomplishes a lownoise, high power output characteristic in a wide dynamic range.

Description of the preamplifiers is ignored here as it was already made previously by reference to Fig. 16.

The 1R-REP 2 can monitor light outputs and intermediate signal powers and detect opening of the outputs so that it can control and monitor a gain of each optical amplifier stage. As described previously, the 1R-REP 2 also can receive and transmit the surveillance and control signal of 1.48 μm wavelength. The monitor and control and processing the surveillance and control signal are made by an surveillance signal processor/automatic power control circuit 310.

Fig. 21 is a block diagram for a package construction of the 1R-REP 2. The main signal system of the 1R-REP 2, as shown in the figure, comprises two packages, including a preamplifier package having the low-noise optical preamplifier 301 and a booster

amplifier package having the high-power optical booster amplifier 320. As will be described later, a single bay having a plurality of shelves, each of which has two systems and the OpS IF as a common section.

5 The ground 1R-REP 2, like the LT-MUX 1 and the 3R-REP 3, has features of preventive maintenance, failure identification, and workability increase.

 These features facilitate troubleshooting for each 1R repeater section. As for the 1R repeater section
10 overhead providing a feature of a surveillance and control communication channel between offices having the 1R-REP 2, as described previously, it uses the surveillance and control light of 1.48 μ m wavelength.

 The following describes monitor of the 1R repeater
15 section and process of the 1.48 μ m surveillance and control signal in detail. It should be noted that the surveillance and control made by the 1R-REP 2 are similarly made by the LT-MUX 1 and the forward pumping optical preamplifier 35 and the optical booster
20 amplifier 34 of the 3R-REP 3.

 Table 9 lists surveillance and control items of the 1R-REP 2.

Table 9

Surveil- lance	Alarm	Signal failure	Optical fiber disconnection
			Main signal (Preceding REP failure)
			Loss of surveillance and control signal (Preceding REP failure)
			Surveillance and control signal LOF (CMI)
			Surveillance and control signal FCS (frame check sequence) error
		Equipment failure	Output open
			Main signal transmit failure
			Surveillance and control signal transmit failure
			Optical amplifier equipment failure
			Surveillance and control equipment failure
	Monitor	Power source system failure	
		Input signal level	
		Intermediate signal level	
		Output signal level	
		Pumping LD temperature	
		Pumping LD bias	
		Surveillance and control LD temperature	
	Surveillance and control LD bias		
Gain			
Control	Year and date setting and reading		
	Output halt and release		
	Failure section determination		

As shown in Fig. 9, the 1R-REP 2 provides the following processes with use of surveillance lights and control signals marked with an encircled number in Fig. 20.

5 Number ① in Fig. 20 denotes a surveillance light signal which is taken by a PF-WDM out of the input light having been composed of the main signal light of 1552 nm wavelength and the surveillance and control light signal of 1480 nm wavelength. The surveillance
10 light signal is 3R-processed to convert to electrical signal by a supervisory signal receiver. The surveillance light signal is used by the automatic power control circuit surveillance signal processor 310 to detect the supervisory signal input disconnection.

15 Number ② in Fig. 20 denotes a monitor light branched from a light output of the low-noise amplifier section by a CPL. The monitor light is used by the automatic power control circuit surveillance signal processor 310 to control the gain, to monitor the input
20 state, and to monitor the intermediate power.

 Number ③ in Fig. 20 denotes another monitor light branched from a light output of the high-power output amplifier section by another CPL. This monitor light is taken out through a BPF. The monitor light is used
25 by the automatic power control circuit surveillance

signal processor 310 to control the gain and to monitor the output state.

Number ④ in Fig. 20 denotes still another monitor light branched through the CPL from a light reflected from the output end. This monitor light is used by the automatic power control circuit surveillance signal processor 310 to detect opening of the output.

Number ⑤ in Fig. 20 denotes control signals used by the automatic power control circuit surveillance signal processor 310 to stabilization-control the output of the pumping source and to monitor LD states.

Number ⑥ in Fig. 20 denotes the surveillance and control signal sent from the automatic power control circuit surveillance signal processor 310. The surveillance and control signal is converted to an optical signal by the surveillance and control light source of 1480 μm wavelength. The optical signal is composed with the light output of the high-power output amplifier by the BB-WDM. The surveillance and control signal is used to monitor the surveillance light source LD state and to detect the supervisory signal transmit failure.

It is needed for the 1R-REP 2 that depending on the surveillance results and the like of the surveillance items, as described above, identification should be

made for the transmission line alarms as to loss of the main signal, transmit failure of the main signal, loss of the supervisory signal, the input fiber disconnection, and the like. Such failure points can be identified by a judgement logic comprehended of the surveillance items ①, ②, and ③. Also, the 1R-REP 2 can detect the equipment failures of the optical amplifier repeater section for preventive maintenance of equipment. Further, the 1R-REP 2 has external control features of output shutdown for safe work.

Furthermore, the 1R-REP 2, as described above, can not only send the surveillance and control information to the downstream equipment depending on the surveillance results of the surveillance and control items, but can also repeat to transfer to the downstream equipment the surveillance and control information received from the upstream equipment.

Still furthermore, the embodiment does not only inform any of the failures of the 1R-REP 2 to the downstream, but also facilitates judgement of a failure point in each of the 1R repeater section and also maintains on the inter-office fiber the surveillance and control communication channel between the office having the 1RREP 2. To do these, the surveillance and control signal light is terminated once for each 1R-REP

2 before being repeated to the downstream through
automatic power control circuit surveillance signal
processor 310 to transfer. This has the advantage that
the surveillance information can be transferred by a
5 single wavelength even if the number of repeaters is
increased.

In turn, if the wavelength used for the supervisory
signal is out of the range of the optical amplifier,
this will not cause saturation in the optical
10 amplifier, and thus will not affect the main signal.
For this reason, the light of 1.48 μm is used as
described above. This light provides as little a
transmission line fiber loss as the main signal
waveform, and allows using a WDM (wave division
15 multiplex) coupler to compose and divide the pumping
light in common.

The CMI code is used to send the surveillance and
control signal. With the CMI code used, a dc component
and zero continuation can be suppressed. Also, a frame
20 synchronizing circuit can be made up of relatively few
components by a frame synchronization method of code
violation.

Fig. 22 is a format for the surveillance and
control signal for use in the surveillance and control
25 of the 1R-REP 2.

The embodiment accomplishes the feature of remote control in a way as that shown in Fig. 22, the surveillance and control signal used is of a 48 byte-long frame for period of 1 msec at a rate of 384 kb/sec, and the DCC of 192 kb/sec is maintained within the surveillance and control signal. The frame has 1 byte for information of severe failures every period of 1 msec. This accomplishes the feature equivalent to the F1 byte of the SDH.

10 6. Description of LT-MUX

This section describes the LT-MUX 1 in detail.

Figs. 23 and 24 are block diagrams for hardware constructions of the long distance system related to the embodiment. Table 10 charts major features of the LT-MUX 1. As for differences of the hardware construction of the LT-MUX 1 for use in the short distance system from those of the long distance system, they will be described below as necessary.

Table 10

ITEM		DESCRIPTION	
		FOR LONG-DISTANCE SYSTEM	FOR SHORT-DISTANCE SYSTEM
Intra-office interface	Transmission rate	155.52 Mb/sec (STM-1) x 64 series or 622.08 Mb/sec (STM-4) x 16 series.	
	Transmission line code	Scrambled binary NRZ.	
	Error rate	Lower than 10^{-11}	
	Light source wavelength	1.31 μm $\pm 0.05 \mu\text{m}$ to $-0.04 \mu\text{m}$ (STM-1); 1.31 μm $\pm 0.05 \mu\text{m}$ to $-0.05 \mu\text{m}$ (STM-4)	
	Average light output	-17 to -11 dBm (STM-1); -15 to -8 dBm (STM-4)	
	Maximum detectable power	Higher than -8 dBm	
	Minimum detectable power	Lower than -24 dBm (STM-1); Lower than -23 dBm (STM-4)	
	Redundancy configuration	1 + 1 dual	
Inter-office interface	Transmission rate	9953.28 Mb/sec (equivalent to STM-64)	
	Transmission line code	Scrambled binary NRZ (non-return to zero)	
	Error rate	Lower than 10^{-11}	
	Light source wavelength	1.552 $\pm 0.001 \mu\text{m}$, with chirping parameter α being 1.0 ± 0.2	
	Average light output	+10 to +12 dBm Direct LT connection: +15 to +16 dBm	+5.6 to +6.6 dBm
	Maximum detectable power	Higher than -7 dBm	Higher than -10 dBm
	Minimum detectable power	Lower than -27 dBm	Lower than -23 dBm
	Redundancy configuration	Mesh switching using virtual ring at VC-3/4 level	
Surveillance and control method		Surveillance control by OpS interface. IR-REP surveillance and control by 1.48 μm wavelength multiplex.	
Physical implementation method		300 mm high with 4 shelves (1800 x 795 x 600 mm)	
Cooling method		Push-pull type forced air cooling, with large fan.	
Accommodation of systems		Two systems per rack.	
Environmental conditions		Temperature: 10 to 40°C Humidity : 20 to 80%	
Input power condition		-42 to -53 V	

Fig. 23 is for the inter-office transmission line of the LT-MUX 1. Fig. 24 is for the intra-office transmission line of the LTMUX 1. The LT-MUX 1, as shown in the figures, comprises a high-speed IF shelf 600, a low-speed IF shelf 700, a supervisory control/OpS 650, an OH IF 660, and a clock section 670.

The high-speed IF shelf 600 comprises an OPTAMP S 601 having features as the optical booster amplifier 14 of the transmitting system, an OPTAMP R 603 having features as the optical preamplifier 15 of the receiving system, a 10G IF S 602, a 10G IF S 604, and a plurality of SOH 605 boards. The lowspeed IF shelf 700 comprises a plurality of SELs 701, and a plurality of intra-office IF 702 packages. The high-speed IF shelf 600 and the low-speed IF shelf 700 are connected together by an intra-equipment interface of 155 Mb/sec rate.

The embodiment has a high-speed interface 600-1, an SEL 701-1, and an intra-office interface 702-1 to have a redundancy feature of 1 + 1 section switching type. These blocks are not needed if the section switching is not made.

Tables 11 and 12 chart the features of the LT-MUX 1.

Table 11

ITEM	BLOCK NAME	FEATURE	NOTE
1	10G IF-S OPTAMP-S	(1) Optical booster amplification (2) IR repeater surveillance and control signal light transmission (3) STM-64 signal E/O conversion (4) 10 GHz PLL (5) STM-64 RSOH transmission (6) Physical rate conversion of 155 Mb/sec to 10 Gb/sec	
2	10G IF-R OPTAMP-R	(1) Optical preamplification (2) IR repeater surveillance and control signal light reception (3) STM-64 signal D/E conversion and clock extraction (4) STM-64 RSOH termination (5) Physical rate conversion of 10 Mb/sec to 155 Gb/sec	
3	SOH	(1) STM-64 MSOH process (2) Pointer conversion of AU-3, AU-4, and AU-4-4c (3) POH monitor of VC-3, VC-4, and VC-4-4c and line test	
4	SEL	(1) System 0/system 1 selection of STM-1/STM-4 intra-office transmission line (2) System 0/system 1 phase matching of VC-3, VC-4, and VC-4-4c (hitless switching) (3) APS protocol control for intra-office transmission line switching	
5	Intra-IF	STM-1 or STM-4 intra-office transmission line termination (1) E/O and O/E conversions (2) SOH process (3) Pointer conversion of AU-3, AU-4, and AU-4-4c (4) POH monitor of VC-3, VC-4, and VC-4-4c and line test Number of accommodated lines is STM-1 x 8 or STM-4 x 2 per board.	
6	SVCONT (LIF)	(1) Information collection in low-speed IF shelf, operation of performance surveillance information, and event made of alarm data * Intra-office section * AU pathbus * Surveillance in equipment (2) Alarm priority processing and failure determination (3) Distribution and status reading of control information in shelf * Software strap of intra-office section * AU line test * Selected status of redundancy system	

Table 12

ITEM	BLOCK NAME	FEATURE	NOTE
7	SVCONT (HIF)	(1) 10G high-speed transmission IF, surveillance information collection of submarine repeater, operation of performance surveillance information, and event mode of alarm data • 1R repeater section • Multiplex section • AU path • Surveillance in equipment (2) Alarm priority processing and failure determination (3) Distribution and status reading of 10G high-speed transmission line IF and repeater control information • Software strap • AU line continuity check • Control and status reading of repeater	
8	SEMF	(1) OpS message conversion (2) Time management and history processing (3) Emergency start-up of backup memory (4) Switching control of clock section and SVCONT (5) Processing of common system alarm	
9	OpS IF	(1) OpS message communication processing	
10	RMT IF	(1) Remote surveillance and control communication by DCC of multiplex section overhead (MSOH)	
11	CREC	(1) B/U conversion of 64 kHz + 8 kHz clock	
12	CDIS	(1) Clock generation (PLL) and distribution in equipment	
13	CSEHD	(1) Transmission of extracted clock	
14	OH IF	(1) Input/output of overhead signal outside equipment (2) OAH processing by overhead signal	

Fig. 25 is a relationship of multiplex and demultiplex between the STM-64 frame and the STM-1x64 supported by the LT-MUX.

A 10G E/O 610 of a 10G IF S 602 and an OPTAMP S 601 form the transmitter of the LT-MUX 1, and a 10G O/E 611

of a 10G IF R 604 and an OPTAMP R 603 form the receiver of the LT-MUX 1.

The following describes the transmitter and the receiver mentioned above.

5 Fig. 26 is a block diagram for the transmitter of the LT-MUX 1 forming the long distance system.

10 The transmitter, as described previously, comprises the 10G E/O S 610 having the high-speed multiplex circuit 682 for converting a 622 Mb/sec, 16-parallel signal to 9.95 Gb/sec signal in a way of a 16-bit multiplex (STM-64) and the electro-optic converter 681 and the OPTAMP S 601 which is an optical amplifier.

15 As shown in the figure, the embodiment uses an external modulation of electric field absorption type for electro-optic conversion. The OPTAMP S 601 is formed of an optical fiber amplifier. The optical fiber amplifier is separately implemented in its respective package in view of its occupying area and consumption power. The transmitter further has a temperature control circuit 683 and an optical output control circuit 684 so that the long-distance transmission can be made even if environmental conditions around the electro-optic converter 681 and the OPTAMP S 601 change. Description of the transmission operation is ignored as it was already

20

25

made by reference to Fig. 16.

Fig. 27 is a block diagram for the transmitter of the LT-MUX 1 forming the short distance system.

The transmitter of the LT-MUX 1 forming the short distance system, as described in the figure, has no OPTAMP S 603. The 10G IF S 602, unlike that of the long distance system, uses a semiconductor optical amplifier of preferably smaller size and lower power consumption for optical amplification in the 80-km transmission. The semiconductor optical amplifier can be made to occupy as narrow an area as the modulator with LD, and can be implemented in the 10G IF S 602 shelf. The embodiment, as shown in the figure, uses a modulator of an electric field absorption type for the external modulator. The electric field absorption type modulator is integrated to a module of small size as electric field absorption type device are structurally practical to integrate with the laser diode for the light source.

Fig. 28 is a block diagram for the receiver of the LT-MUX 1 forming the long distance system.

The receiver comprises the OPTAMP R 603 which is an optical amplifier and the 10G O/E 611 having an opto-electric converter 693 and a high-speed demultiplex circuit 692. The OPTAMP R 630, as shown in

the figure, is made up of an optical fiber amplifier having an optical preamplifier feature, and is separately implemented in its respective board. The opto-electric converter 693 is made up of a front module, an amplifier, a timing extractor, and an
5 dicision circuit. The highspped demultiplex circuit 692 converts the 9.95 Gb/sec signal to 622 Mb/sec in a way of parallel demultiplex. Description of the reception operation is ignored as it was already made
10 by reference to Fig. 16.

Fig. 29 is a block diagram for the receiver of the LT-MUX 1 forming the short distance system.

The short distance system is different from the long distance system in that the short distance system
15 has no OPTAMP R 603 and uses an APD 694 for opto-electric conversion. As its APD 694 is capable of higher sensitive reception than Pln-PD, the short distance system needs no optical amplifier, thus resulting in a smaller system.

20 In turn, if the LT-MUX 1 and the ADM switch are combined to form the small scale switching node 120 as in Fig. 6, the high-speed IF shelf, the low-speed IF shelf 700, and a 40G switch shelf are combined as shown in Fig. 30. The 40G switch shelf comprises
25 multiplexing circuits 901 for multiplexing the input

signals to feed to time-division switches 903, the
time-division switches 903, and demultiplexing circuits
902 for demultiplexing the signals from the
time-division switches 903. An interface of the
5 multiplexing circuits 901 and the demultiplexing
circuit 902 is the intra-equipment interface.

In turn, the signal from the transmission line is
processed by the high-speed IF shelf 600 before being
directly input to the switch without the low-speed IF
10 shelf 700. The signal to be dropped into the office,
is connected to the low-speed IF shelf 700. As for the
signal to be passed to the another node, it is
connected to the high-speed IF shelf 700 before being
15 fed out to another node. That is, the signal from the
transmission line is not converted as to interface by
the lowspeed interface before being connected to the
switch, as usual.

But, the high-speed IF shelf 600 is directly
connected with the switch. This can make the equipment
20 smaller.

If the small scale switching node 120 or the large
scale switching node 110 is constructed to have the
cross-connection switch feature, the 40G switch in
Fig. 30 is replaced by a multi-stage switch configured
25 of a plurality of 40G switch shelves.

As described above, the embodiment can appropriately combine the high-speed IF shelves 600, the low-speed IF shelves 700, and the 40G switch shelves 900 in the building block way. This allows
5 accomplishment of a desired equipment with use of the common shelves in a minimized construction. Also, the embodiment allows accomplishment of the 3R-REP 3 by combination of the boards of the high-speed IF shelf 600 as will be described later.

10 The following describes the surveillance and control system for the LT-MUX 1.

Fig. 31 is a block diagram for extracted parts serving to the surveillance and control system for the
+ LT-MUX 1.

15 Fig. 32 lists features of the functional blocks.

Figs. 13, 14, 15, and 16 chart features of the surveillance and control system.

In Figs. 31 and 32, the SVCONT 703 is installed for each low-speed IF shelf. The SEMF 651, the OpS IF 652,
20 and RMT IF 653 are equipped in the common a shelf as will be described later.

Table 13

	FEATURE	DESCRIPTION	NOTE
1	Path setting	<p>(1) Switch control memory is updated to set path according to the control message from the operation system outside equipment.</p> <p>(2) Path setting units include:</p> <ul style="list-style-type: none"> a. Units of VC-3 b. Units of VC-4 c. Units of VC-4c (600 M at max) <p>(3) This feature is an option for implementation of crossconnection feature</p>	Control system
2	Software strap setting	<p>(1) Control register of each section in equipment is updated to set operation mode (software strap) according to control message from operation system outside equipment.</p> <p>(2) Major software strap features include:</p> <ul style="list-style-type: none"> a. Transference approval or inhibition of transmission line system alarm b. Threshold of error rate degradation c. Protection time of switching control (NOTE 1) 	Control system NOTE 1: Upon use of section protection feature
3	Path test	<p>(1) Test access point is set to confirm continuity and set quality in units of path according to the control message from the operation system outside equipment.</p> <p>(2) Path testing units include:</p> <ul style="list-style-type: none"> a. Units of VC-3 b. Units of VC-4 <p>(3) Test pattern conforms to CCITT Recommendation 0.151</p>	Control system
4	Redundancy system switching in equipment	<p>(1) The operation system switches over functional components of equipment having redundancy form according to the control message from the operation system outside equipment. (Forced switching)</p> <p>(2) As results of equipment diagnosis, the operation system switches over to the protection side from function component of equipment judged at failure. (Autonomous switching)</p> <p>(3) Operation modes of redundancy system include:</p> <ul style="list-style-type: none"> a. Automatic mode, allowing autonomous switching b. forced selection mode c. Lock-out mode 	Control system Surveillance system

Table 14

	FEATURE	DESCRIPTION	NOTE
5	Configuration management	<p>(1) Implementation states of functional components of equipment are monitored, and the database for configuration management in the control system is automatically updated as needed.</p> <p>(2) When the implemented functional component does not logically match with the physical implementation position, then an alarm is issued.</p> <p>(3) Management units for functional components of equipment include:</p> <ul style="list-style-type: none"> a. Board b. Board group c. Shelf 	Surveillance system
10	Alarm transference	<p>(1) Transmission line system alarms are collected from line termination feature blocks and path connection feature blocks to detect generation and restoration of alarms before transmission line system alarms are made into an event.</p> <p>(2) On basis of diagnosis results of equipment failure, equipment alarms are made into an event.</p> <p>(3) Contents of these alarms made into a event are converted to messages before being informed to external surveying operation system.</p>	Surveillance system
15	Performance management	<p>(1) Performance information, such as a bit error, are collected from line termination feature blocks and path connection feature blocks to calculate and generate performance management information for transmission lines and paths.</p> <p>(2) The performance management information includes:</p> <ul style="list-style-type: none"> a. CV (code violation) b. ES (errored second) c. SES (severely errored second) <p>(3) Types of registers for history management includes:</p> <ul style="list-style-type: none"> a. 1-sec register b. 15-min register c. 1-day register 	Surveillance system
20			
25			

Table 15

	FEATURE	DESCRIPTION	NOTE
7	Equipment diagnosis	<p>(1) Failure surveillance information is collected from functional components of equipment, and a specific functional component having a hardware failure generated is identified on the basis of the failure judgement map provided in the surveillance and control system.</p> <p>(2) Specific functional component having a hardware failure generated is logically disconnected, and the operation system switches over from the functional component of redundancy configuration to the protection side.</p> <p>(3) Equipment information is sent out to inform existence of a functional component having a failure generated.</p>	Surveillance system
9	Section switching control	<p>(1) If a section failure happens, section switching is controlled on the basis of MSP protocol.</p> <p>(2) Switching system includes the following manners:</p> <ul style="list-style-type: none"> a. 1 + 1 (without switch-back) b. Bi-directional switching <p>(3) Switching is caused by include:</p> <ul style="list-style-type: none"> a. SF switching (LOS, LOF, S-AIS, and hardware failure) b. SD switching (MER) c. Forced switching (Ops command) <p>(4) This feature is optional.</p>	<p>Control system Surveillance system</p> <p>MPS: Multiplan Section Protection</p>
10	Path switching control	<p>(1) If a path failure is detected with generation of a failure in the ring meshed network, section switching is controlled on the basis of MSP protocol.</p> <p>(2) Switching system includes the following manners:</p> <ul style="list-style-type: none"> a. 1 + 1 (with switch-back) b. Bilateral switching <p>(3) Switching is caused by include:</p> <ul style="list-style-type: none"> a. SF switching (LOF, P-AIS, and hardware failure) b. SD switching (MER) c. forced switching (Ops command) <p>(4) This feature is optional for implementation of cross-connection feature.</p>	<p>Control system Surveillance system</p> <p>PGP = Path Group Protection</p>

Table 16

	FEATURE	DESCRIPTION	NOTE
11	History management	(1) Variety of events generated as to transmission line received signals and equipment statuses are recorded and managed as history information. (2) History information to be managed includes: a. Redundancy system switching history b. Signal performance history c. APS information changing history	Control system Surveillance system
12	Backup information management	(1) If the operation state in equipment is changed, then the changed state is automatically recorded in nonvolatile memory as the latest information. (2) Information to be recorded includes: a. Operation information of redundancy system b. Information of software strap c. Path setting information (NOTE 1) (3) The following processes are made with the control message from the control operation system a. Update of backup information b. Comparison with statuses in equipment c. Initialization of backup information	Control system NOTE 1: With use of cross-connection feature
13	Emergency start-up	(1) If it is powered on, equipment is autonomously started up for operation on basis of backup information.	Control system
14	Communication control	(1) Control is made on communication with the operation system outside equipment. (2) Communication is of a message form and has a protocol system on basis of the Q interface of CCITT Recommendations. (3) Two independent communication links are provided, including the control system and surveillance system.	Control system Surveillance system
15	OpS message conversion	(1) Control information of message received from operation system is converted to the command form specific to equipment. (2) Control information and surveillance information of the command form specific to equipment are converted to information of message form before being sent to the operation system.	Control system Surveillance system

Fig. 33 is a block diagram for the redundancy configuration of the transmitting system in the LT-MUX 1. Fig. 34 is a block diagram for the redundancy configuration of the receiving system in the LT-MUX 1.

5 In general, operations including AU pointer conversion are nonhitlessly switched. To make this hitless, a hitless switching process is needed. In the embodiment, in view of the balance of the features provided in the whole equipment, the AU pointer
10 conversion process is provided in the intra-office interface and the high-speed interface unit. In the SEL 701 between these is provided a hitless switching process feature section which will be described later. As shown in the figures, simplex sections are optical
15 booster amplifier 601, 10G IF-S 602 and the SOH 605 in the operation form without the 1 + 1 section switching in the 10 Gb/sec transmission line.

As the intra-office interface is an interface to be connected with an existing intra-office equipment, the
20 redundance configuration follows the manner of the existing equipment. That is, the redundance configuration is made of the 1 + 1 section switching type of system 0/system 1 without switch-back. The board for the intra-office interface accommodates a
25 plurality of highways. Auto-switching at failure is

made in units of transmission line. The intra-office interface board, therefore, has working highways and waiting highways mixed therein. For this reason, for interface package maintenance, a hitless forced
5 switching is needed which will be described later.

The SEL 701, as shown in Figs. 23 and 24, is arranged so that it can be added or removed depending on the situation of transmission line accommodation. The SEL 701, therefore, is arranged so that it can be
10 automatically switched in units of package in the 1 + 1 way. Note that if the hitless forced switching which will be described later is made for the SEL 701, this is hitlessly made by the hitless switching process
section.

15 Now, the following describes the hitless switching process.

Fig. 35 is a block diagram for construction of the hitless switching process feature section for transmission line. Table 17 lists features of
20 functional blocks of the hitless switching process feature section.

Table 17

NO.	ITEM	FEATURES
1	AU pointer termination	AU pointer byte and AU stuff operation are read. It is instantaneously taken in without protection of consecutive coincidence three times.
2	2 x 2 SEL	Selector for passing delayed system through, but storing preceding system into VC buffer.
3	VC buffer	FIFO memory for delaying preceding VC-3, VC-4, and VC-4-4c data. Adjustable distance difference is 4 km.
4	VC buffer writing control	Writing address counter for VC buffer. Only VC-3, VC-4, and VC-4-4c data of input signal are written according to detection of AU stuff.
5	VC buffer reading control	VC buffer is read in line to AU stuff of the delayed system. If delay insertion is needed to increase in phase synchronizing pull-in course, positive stuff is added. If it is needed to decrease, negative stuff is added.
6	Delay insertion calculation	Delay insertion of FIFO is calculated through calculation of the writing address minus reading address.
7	Phase difference detection	Transmission delay difference is detected by comparison of AU pointer values.
8	Delay insertion control	Result of delay insertion calculation is compared with result of phase difference detection. If it is necessary to increase delay insertion, positive stuff is added on VC buffer reading side. If it is necessary to decrease delay insertion, negative stuff is added on the VC buffer reading side. 2 x 2 SEL is controlled depending on the direction of the delay difference generation.
9	Pointer calculation	New pointer value is calculated by comparison of the VC input phase of the VC buffer with output frame phase.
10	Pointer insertion	New pointer value is written in VC buffer output signal. Following specific patterns are written in predetermined positions. (1) On generation of stuff: Inversion of bits 1 and 0. (2) On jump of pointer: Sending of NDF pattern. (3) On AU-4 or AU-4-4c: CI (concatenation indicator). (4) On sending of P-AIS: All 1 of all bytes.

As depicted in Table 17, the hitless switching process feature section makes the received data, including VC-3, VC-4, and VC-4-c data, of the system having less transmission delay of systems 0 and 1 delay in FIFO memory (VC buffer) as necessary. This makes contents of the output signals of both systems coincide. Detection of the transmission difference is made by comparison of the pointer values. Adjustment of the delay insertion of the FIFO is made with stuff operation of the AU pointer so gradually that the signal of the working system will not be hit while the phase synchronizing pull-in is made in maintaining the protection system. In writing into the VC buffer, the AU pointer is terminal once before only the VC-3, VC-4, and VC-4-c data are written in the VC buffer. In reading from the VC buffer, on the other hand, reading is made along with the operation of the AU stuff in line with that of the AU stuff in the delayed line. In a phase synchronized state, thus, the system 0 can be made to coincide with the system 1 perfectly not only in the phases of the output VC signals, but also the timings of the AU stuffs. This means that the hitless switching can be made securely even if the frequency of the AU stuff is higher.

The VC buffer is a kind of AU pointer converting

circuit. At the time of output, a new AU pointer value is calculated before being inserted into the AU. The calculation principles are the same as those of the usual pointer converting circuit. As the adjustable
5 transmission delay difference is 4 km, the process cannot only be applied to the intra-office transmission line, but also to a short or intermediate inter-office transmission line. Thus, in the SEL, the hitless
switching process feature section is constructed so
10 that it cannot be used for switching the intra-office interface, but also for switching the 10 Gb/sec transmission line interface.

7. Description of 3R-REP

Fig. 36 is a block diagram for a construction of
15 the 3R-REP 3. Table 18 lists features of functional blocks of the 3R-REP 3.

Table 18

ITEM		DESCRIPTION
Main signal interface	Transmission rate	9953.28 Mb/sec (equivalent to STM-64)
	Transmission line code	Scrambled binary NRZ (non-return to zero)
	Error rate	Lower than 10^{-11} /repeater.
	Light source wavelength	$1.552 \mu\text{m} \pm 0.001 \mu\text{m}$
	Average light output	+10 to +12 dBm
	Maximum detectable power	Higher than -7 dBm
	Minimum detectable power	Lower than -27 dBm
Surveillance and control method		<ul style="list-style-type: none"> Surveillance and control signal transference by $1.48 \mu\text{m}$ wavelength multiplexed signal. Implementation of surveillance control section in main signal unit.
Physical implementation method		300 mm high with 4 shelves per frame (1800 x 795 x 600 mm).
Cooling method		Push-pull type forced air cooled type, with large fan.
Accommodation of systems		One system per shelf, with one bidirectional system of west and east.
Environmental conditions		Temperature: 10 to 40°C Humidity : 20 to 80%.
Input power condition		-42 to -53 V

The 3R-REP 3 makes regeneration through its optical preamplification, O/E conversion, E/O conversion, and optical booster amplification. The 3R-REP 3 also makes the surveillance, alarm transference, and remote maintenance for the 1R repeater section and the 3R repeater section with use of the 1.48 μ m surveillance and control light and the RSOH (regenerator section overhead). The boards used in the main signal system are all the same as those of the LT-MUX 1.

8. Implementation of the 1R-REP, LT-MUX, and 3R-REP
The following describes implementation of the 1R-REP 2, LT-MUX 1, and 3R-REP 3.

First, implementation of the 1R-REP 2 is described below.

Fig. 37 is a front view for an implementation of the 1R-REP 2.

A rack of the embodiment, as shown in the figure, has three shelves each of which contains two 1R-REP 2 systems, or six 1RREP 2 systems in total. Each system comprises two subsystems: the repeaters 301 and 302. For an unattended office which needs remote monitor and control, these are implemented in the same shelf as the system to which the OpS IF 651 and the like serve. Note that a power source board 810 is for the optical preamplifier 301 and the optical booster amplifier 320.

Fig. 38 is structures of the optical preamplifier 301 and optical booster amplifier 320 forming a single 1R-REP 2 system. The optical preamplifier 301 and the optical booster amplifier 320, as shown in Fig. 37, occupy two-fold and four-fold widths in reference to a standard board width respectively, or six-fold width in total. They are naturally air-cooled. Note that a TEC drive circuit in Fig. 38 is a circuit added to the pumping light source to control a temperature adjustment for thermoelectron cooling devices.

Implementation of the LT-MUX 1 is described below.

Fig. 39 is a front view for an implementation of the LT-MUX 1.

The construction shown is for accomplishing the transmission line 1 + 1 redundancy system switching. The functional boards of the high-speed IF unit 600 and the low-speed IF unit 700, as shown in the figure, are all doubled as in a working system 0 and a waiting system 1. Fig. 40 is a front view for an implementation of two systems of the LT-MUX 1 in a single rack without the redundancy configuration.

The 10G IF R 604 package and the 10G IF S 602 board, as shown in the figure, are of two-fold wide as these have many components. Similarly, the OPTAMP R 603 board and the OPTAMP S 601 board are of

two-fold wide.

Fig. 41 is a front view for an implementation of the LT-MUX 1 for constructing the small scale switching node 120 with the 40G switch unit built in as shown in Fig. 6b.

In this case, as shown in the figure, are implemented two highspeed interface units 600, a duplexed 40G switch unit 900, and a duplexed low-speed IF unit 700. The 40G switch unit 900, as shown in Fig. 42, is three-dimensionally constructed in view of the flow of its signals. That is, a plurality of boards MUX/DMUX containing a plurality of multiplex/demultiplex circuits 901 and 902 and a time-division switch (TSW) 903, are three-dimensionally connected together with use of a subpanel for a time switch unit. This construction can be made small.

Implementing the 40G switch into the shelf is made in a way that the TSW 903 is put in front, the 40G switch unit 900 is put into the shelf, and the MUX/DMUX board 901/902 is connected with other units on the rear side of the shelf.

Fig. 43a is a front view for an implementation of the LT-MUX 1 for constructing the large scale switching node 110 with a multi-stage switch meshed network of a plurality of the 40G switch units built therein.

In this case, as shown in the figure, a plurality of racks have the 40G switch units, the high-speed IF units 600, and the lowspeed IF units 700 built therein so that the high-speed IF units 600, and the low-speed IF units 700 can be connected with the switch multi-stage network.

Finally, Fig. 44 is a front view for an implementation of the 3RREP 3.

As shown in the figure, a single rack has four shelves each of which contains a main signal board, including OPTAMP R 603, 10G IF R 604, 10G IF S 602, and OPTAMP S 601 packages, and a common section, such as an OpS IF 651. This construction allows a single shelf to complete all the features of a single equipment. It is possible to easily increase or remove the equipment in shelf units as needed.

As described so far, the present invention can flexibly build up the optical transmission system depending on capacities and function required.